

UNi-2165H

THERMAL IMAGER

Temperature range: 30°C~45°C
Accuracy: $\pm 0.5^{\circ}\text{C}$



UFP sensor



High/low
temperatures
measurement



High image
visibility



Adjustable
emissivity



Storage card

30°C
~
45°C

Temperature
range

160
x
120

Thermal
resolution



High temperature
alarm




Type-C USB port
for charging and
data transmission



Flashlight

UNi-2165H

www.petawise.com

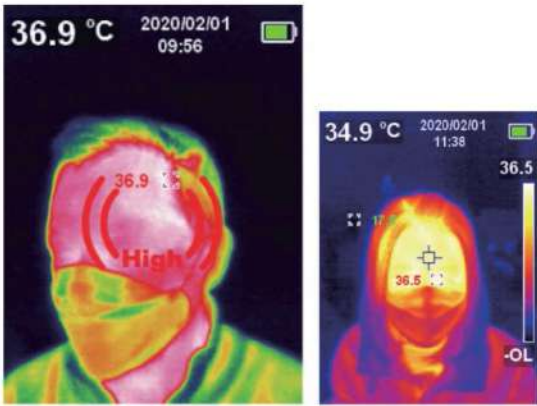

HI/LO Temperature Alarm: Central point temperature measurement, high/low temperature auto tracking and real-time temperature display.



PC software for image analysis: Supports SD card and USB import; with powerful image processing capability.

SPECIFICATION	UNi-2165H
Sensor	Uncooled focal plane
Temperature range	30°C~45°C
Resolution	0.1°C
Accuracy	±0.5°C @1m
Minimum measuring distance	15cm
Temperature measurement response time	≤500ms (95% of reading)
Thermal resolution	19200 (160×120)
Pixel dimensions	12μm
Palettes	Black white, red white, blue white, iron red, rainbow,
Bandwidth of infraed spectroscopy	8~14μm
Field of view (FOV)	56°(H) × 42°(V)
Instantaneous field of view (IFOV)	6mrad
Thermal imaging sensitivity	<50mk
Frame rate	<9Hz
Temperature display	Center temperature measurement and high temperature tracking (default)
Image format	BMP
Image modes	Thermal imagery
Temperature measuring point	Besides central point, 3 temperature measuring points can be added
Display resolution	320×240
PC analysis software (PC)	√
Data communication	Type-C USB
Auto power off	Selectable (5min, 10min, 30min), 30min auto power off (default)
Service time	≥6 hours
Charging time	4 hours
Image storage	Micro SD card
GENERAL CHARACTERISTICS	
Power	A single Li-ion 3.7V/5000mAh 26650 battery
Display	2.8" TFT LCD
Product color	Red + grey
Product size	236mm x 75.5mm x 86mm
Standard accessories	Manual, Type-C USB cable, 16GB TF card
Standard carton gross weight	2.2kg